LX Series LED Linear Utility Lighting




LED Driver Electrical and Dimming Control Specification 18-38Watt

110 M W (E c Mus

Input Voltage: 90-277VAC 47~63Hz	Safety Meet: UL1310+UL8750 Class 2, CE, RoHS
Input Inrush Current: < 10A / 115VAC, < 20A / 230VAC	Operation Temp: -40°C - +55°C
Power Factor: > 0.92 at Full Load, 115 / 230 / 277VAC	Storage Temp: -40°C - +85°C
Total Harmonic Distortion: <20%@277VAC	Meet: EN55015, EN61547, EN61347-2-13, EN6100-3-2,
Efficiency: ≥90%	EN61000-3-3, FCC Class B
Protection OCP, SCP, OVP - Auto Recovery	Surge Protection: 4KV
•	•

NOTE: All Values Have ±7% Tolerance 0-10V Dimming Control

Wiring & Application Diagram

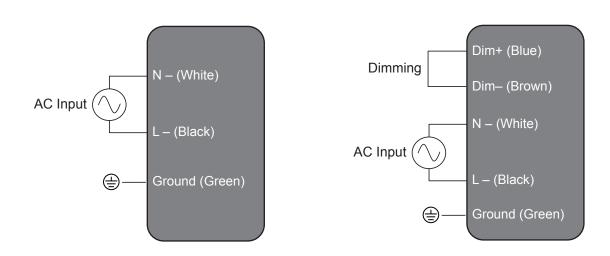

- NOTE: Ensure that all line voltage wire is intended for specified product wattage.
 - Use UL and / or CE approved wires for all input connections, minimum size required 22 AWG (0.33mm²)
 - · Refer to the specific dimmer installation manual for exact wiring instructions.

WARNING

RISK OF ELECTRIC SHOCK

- Installation must be done by a certified electrician and / or qualified personnel.
- Make sure to turn OFF the main power from the circuit breaker or fuse box before installing, servicing or inspecting this luminaire.
- · Make sure all grounding wires are connected correctly.



LX Series LED Linear Utility Lighting




LED Driver Electrical and Dimming Control Specification 18-38Watt

Output Dimming Control

The method to dim the output current of the driver is done via the +Dim/-Dim Signal pins. The +Dim/-Dim Signal pins respond to a 1 to 10 V signal, delivering 10% to 100% of the output current based on rated current for each model. A pull-up resistor is included internal to the driver. When the +Dim input is <1 V or short circuited to the -Dim wire (grey) or to the -LED wire (black), the output current is programmed to 10% of rated current. If the +Dim input is >10V or open circuited, the output current shall be programmed to 100% of rated current. The maximum current supplied by the +Dim Signal pin is < 600 µA.

The following graph shows the relationship of the output current to the dimming input voltage.

Normalized Output Current versus Dimming Voltage

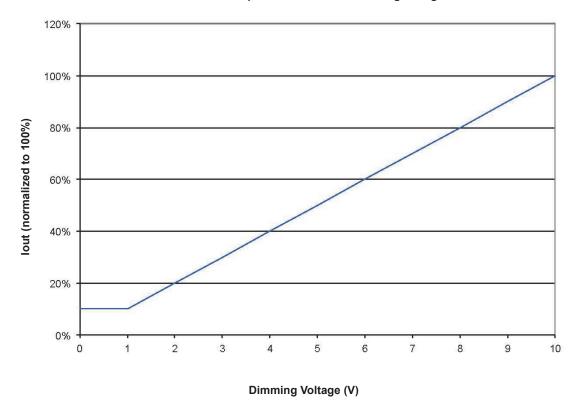



Made in Taiwan Designed and Engineered in the USA